

### Surface:

Designed with a special printing method,  
factory sealed with sportsfloor finish

### Top layer:


18 mm special birch plywood  
according with EN 13986 - EN 636 - 2S

### Interlocking system:

Patented Speed-Lock  
aluminum connectors

### Elastic layer:

18 mm laminate composite foam,  
permanently affixed to the middle layer



Length:  
2470 mm



Width:  
613 mm




EN 428, EN 429 Thickness:  
approx. 36 mm



Weight per Module:  
approx. 24 kg

### one.

Safe and easy assembling. Lengthwise connection by Speed-Lock Aluminum connectors.  
The head-joints are connected by a metal hook and a plastic sleeve.

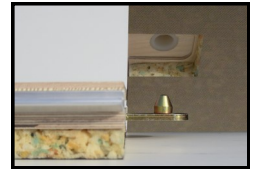

### two..

The plastic tongue ensures precise planarity  
and prevents an offset of the head joints.




### Speed-Lock...

No separate components - the foam layer and the surrounding wedge-shaped  
border are permanently affixed to the modules.



- Tested and certified in accordance with  
EN 14904:2006 and DIN V 18032-2:2001-04
- EN 14904 Floortype A4
- The system can be equipped with various top layers  
(4 mm max. - without additional elastic layer) and  
still maintains its tested properties.
- Factory sealed with sports flooring lacquer  
- ready to play

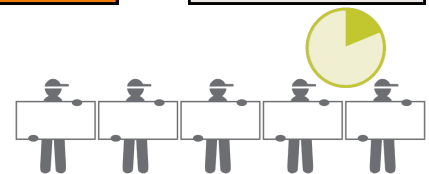

**1000 m<sup>2</sup> in 4 hours**

Basic prerequisite: a solid, clean, dry and  
level surface according with DIN 18202,  
Table 3, Line 4

manufactured by **HOLZ SPECKMANN** Germany

Weststraße 15 | D - 33790 Halle/ Westfalen

Fon: 0049 (0) 5201189215 | Fax: 0049 (0) 5201189312

[www.speed-lock.com](http://www.speed-lock.com) | [info@speed-lock.com](mailto:info@speed-lock.com)