

SPEED-LOCK

Mobile Sports + Cover Floors

Product overview Cover

Mobile cover flooring

Top layer:

240 g/m² phenol resin coating with nub/ hexagon pattern

Load distribution board:

18 mm special birch plywood in accordance with EN 13986 - EN 636 - 2S, factory sealed edges

Interlocking system:



Patented Speed-Lock aluminum connectors

Bottom layer:

120 g/m² phenol resin film-coating

Upon request:

2 mm Cork bottom layer

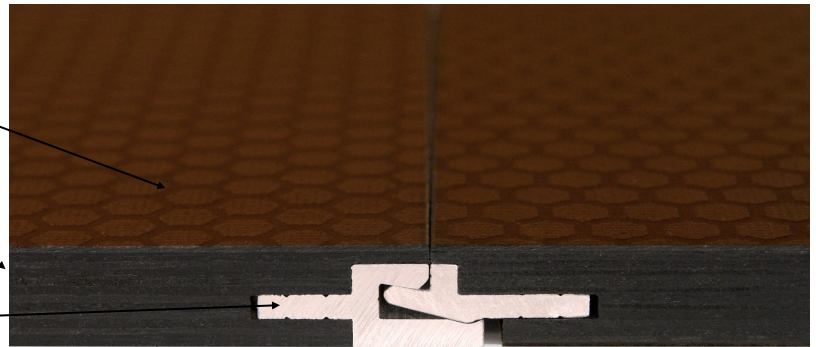

Length:
2480 mm



Width:
620 mm



EN 428, EN 429 Thickness:
approx. 18 mm




Weight per module:
approx. 22 kg

One. Two.. Three...

Safe and easy assembling. Lengthwise connection by Speed-Lock Aluminum connectors.

Safe and The plastic tongue ensures precise planarity
and prevents an offset of the head joints.

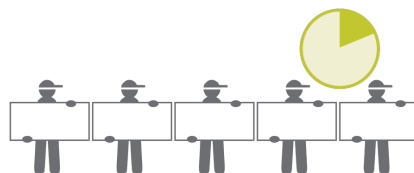

200 m² in 1 hour

Basic prerequisite: a solid, clean, dry and level surface according with DIN 18202, Table 3, Line 4

manufactured by **HOLZ SPECKMANN** Germany

Weststraße 15 | D - 33790 Halle/ Westfalen

Fon: 0049 (0) 5201189215 | Fax: 0049 (0) 5201189312

www.speed-lock.com | info@speed-lock.com

02/2021