

Top layer/ load distribution board:

18 mm special birch plywood according with EN 13986 - EN 636 - 2S with a sturdy 240 g/ m² phenoln resin coating and a nub structure

Interlocking system:



Patented Speed-Lock aluminium connectors

Insulation layer:

45 mm XPS polystyrene rigid foam

Bottom layer:

0,4 mm hard PVC

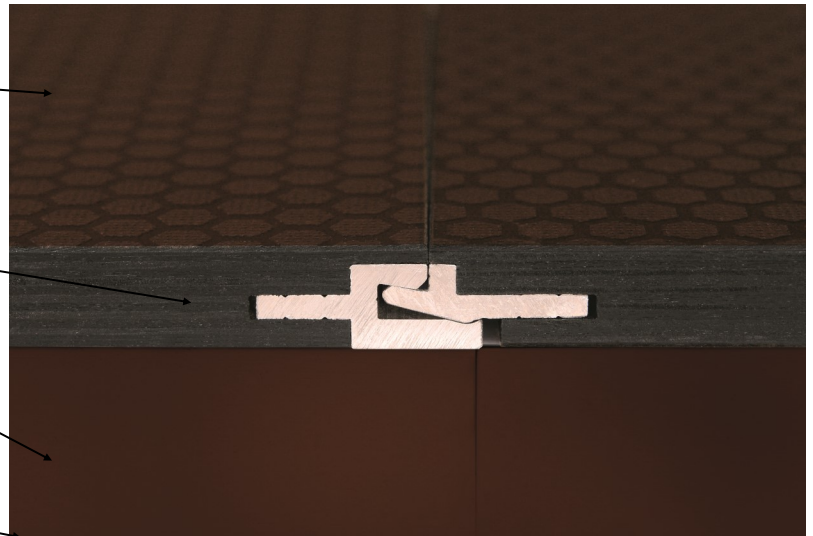

Length:
2400 mm



Width:
600 mm



Thickness:
approx. 64/ 67 mm



Weight per module:
approx. 30 kg

Insulation value


At an air temperature of +18°C and an ice temperature of -7°C the system achieves a guaranteed surface temperature of +11°C.*



High load capacity

The surface can be driven on by forklifts or trucks with a total weight of not exceeding 10 tons (incl. load).
Maximum point load of 5000 kg on 20 x 20 cm.

1800 m²



manufactured by **HOLZ SPECKMANN** Germany

Weststraße 15 | D - 33790 Halle/ Westfalen

Fon: 0049 (0) 5201189215 | Fax: 0049 (0) 5201189312

www.speed-lock.com | info@speed-lock.com