

Top layer:

7,5 mm point-elastic PVC sports floor surface according with current pattern range, IHF & FIVB certified

Middle layer:



18 mm special birch plywood according with EN 13986 - EN 636 - 2S

Interlocking system:

Patented Speed-Lock aluminum connectors

Elastic layer:

18 mm laminate composite foam, permanently affixed to the middle layer

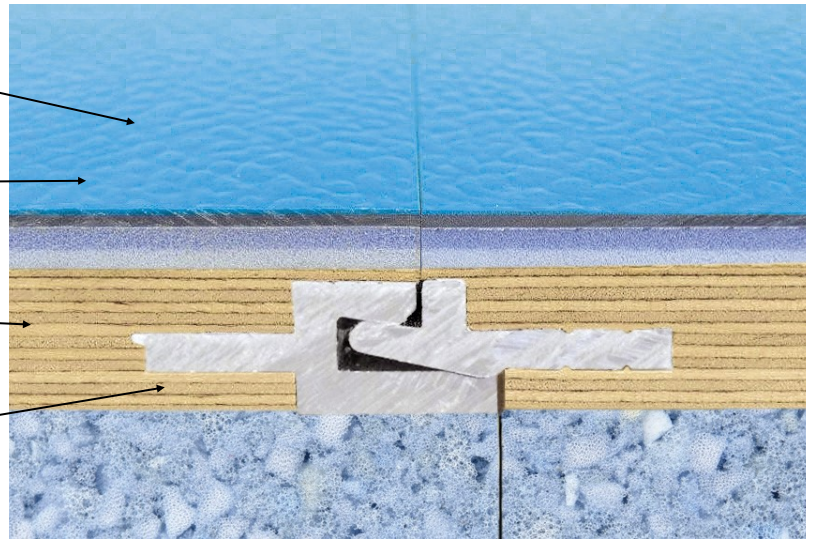

Length:
2470 mm



Width:
613 mm




Thickness:
approx. 43 mm



Weight per module:
approx. 30 kg

one.

Safe and easy assembling. Lengthwise connection by Speed-Lock Aluminum connectors.
The head-joints are connected by a metal hook and a plastic sleeve.

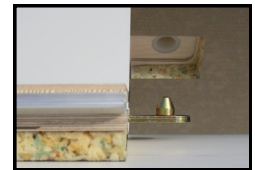

two..

The plastic tongue ensures precise planarity
and prevents an offset of the head joints.




Speed-Lock...

No separate components - the foam layer and the surrounding wedge-shaped border are permanently affixed to the modules.



- Tested and certified in accordance with EN 14904:2006 und DIN V 18032-2:2001-04
- EN 14904 Floortype C4
- Combi-elastic sports floor especially developed for Handball and Volleyball

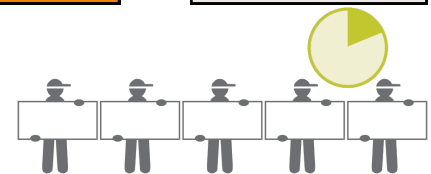

1000 m² in 4 hours

Basic prerequisite: a solid, clean, dry and level surface according with DIN 18202, Table 3, Line 4

manufactured by **HOLZ SPECKMANN** Germany

Weststraße 15 | D - 33790 Halle/ Westfalen

Fon: 0049 (0) 5201189215 | Fax: 0049 (0) 5201189312

www.speed-lock.com | info@speed-lock.com