

Top layer:

3,6 mm parquet wear layer, factory sealed
Wood species: can. Maple or Oak

Middle layer:


15 mm special birch plywood
according with EN 13986 - EN 636 - 2S

Interlocking system:

Patented Speed-Lock
aluminum connectors

Elastic layer:

18 mm laminate composite foam,
permanently affixed to the middle layer

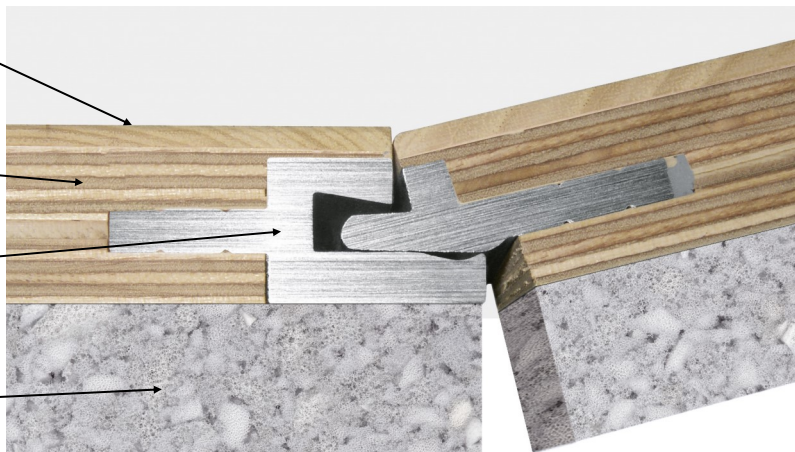

Length:
2470 mm



Width:
613 mm



Thickness:
approx. 37 mm



Weight per Module:
approx. 24 kg

one.

Safe and easy assembling. Lengthwise connection by Speed-Lock Aluminum connectors.
The head-joints are connected by a metal hook and a plastic sleeve.



two..

The plastic tongue ensures precise planarity
and prevents an offset of the head joints.




Speed-Lock...

No separate components - the foam layer and the surrounding wedge-shaped
border are permanently affixed to the modules.



- Tested and certified in accordance with EN 14904:2006 and DIN V 18032-2:2001-04
- Vertical Ball Behaviour: 98 % (EN 14904:2006 and DIN V 18032-2:2001-04)
- EN 14904 Floortype A4
- FIBA certified - Competition Level 1 & 2
- Fire behaviour according with EN 13501-1:2010: Cfl-s1
- Formaldehyde: E1

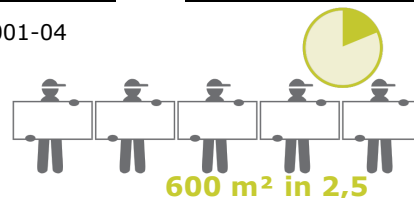

600 m² in 2,5

Basic prerequisite: a solid, clean, dry and
level surface according with DIN 18202,
Table 3, Line 4



manufactured by **HOLZ SPECKMANN** Germany

Weststraße 15 | D - 33790 Halle/ Westfalen

Fon: 0049 (0) 5201189215 | Fax: 0049 (0) 5201189312

www.speed-lock.com | info@speed-lock.com