SPEED-LOCK

Mobile Sports + Cover Floors

Product overview **S20**

Area-elastic mobile sports floor

Top layer:
3,6 mm parquet wear layer,
Wood species: Oak, Ash or Can. Hard Maple
seamless, factory sealed

Middle layer:
15 mm special birch plywood
according with EN 13986 - EN 636 - 2S

Interlocking system:
Patented Speed-Lock aluminum connectors

Elastic layer:
18 mm laminate composite foam
permanently affixed to the middle layer

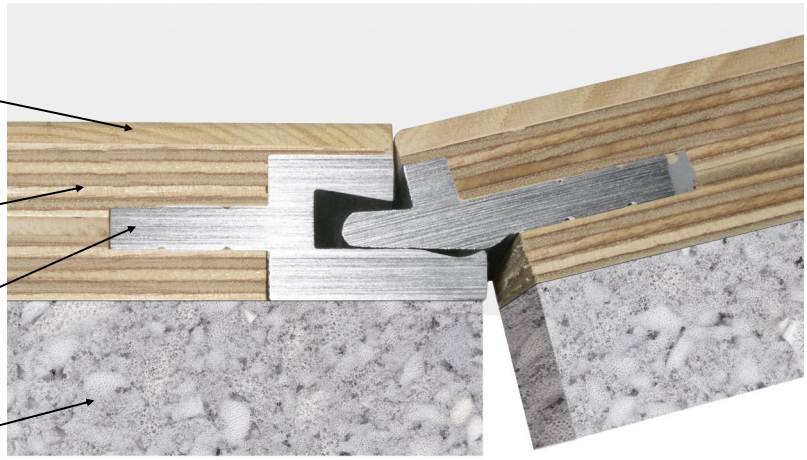

Length:
2470 mm

Width:
613 mm

EN 428, EN 429
Thickness:
approx. 37 mm

Weight per Module:
approx. 24 kg

one.

Safe and easy assembling: Lengthwise connection by Speed-Lock aluminum connectors.
The head-joints are connected by a hook and eye connection.



two..

The plastic tongue ensures precise planarity
and prevents an offset of the head joints.



Speed-Lock...

No separate components - the foam and the surrounding wedge-shaped
border are permanently affixed to the modules.



- Tested and certified in accordance with
  EN 14904:2006 and DIN V 18032-2:2001-04
- EN 14904 Floortype A4
- FIBA certified - Competition Level 1
- Fire behaviour according with EN 13501-1:2010: Cfl-s1
- Formaldehyde emission: E1

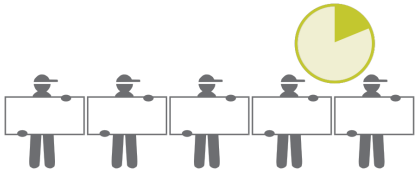

600 m² in 2,5 hours

Prerequisite: a solid, clean, dry and level surface according with DIN 18202, Table 3, Line 4

FIBA APPROVED EQUIPMENT

CE

manufactured by HOLZ SPECKMANN Germany

Holz-Speckmann GmbH & Co. KG
Weststraße 15
33790 Halle/ Westfalen, Germany

Fon: +49 (0) 5201 189215
www.speed-lock.com
info@speed-lock.com

01/2026